


## "ECW" SERIES WALL QUARTER-WEIGHING SCALES



ECW130

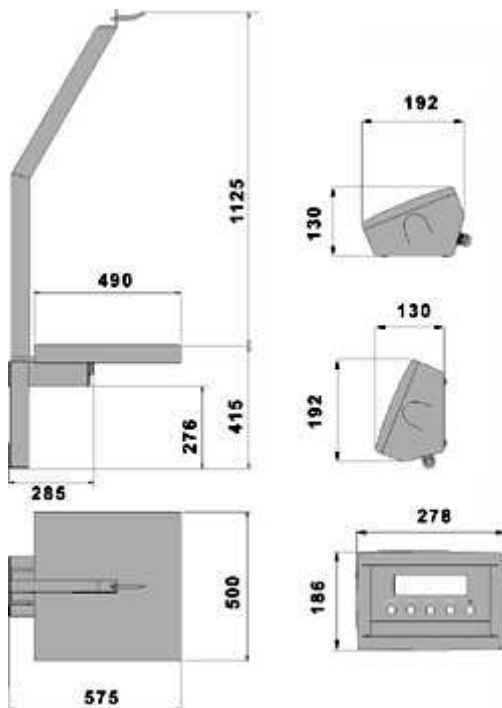

dimensions in mm

### OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Thermal printer Option Box
- Time / Date
- CE-M approved models for use with third parties: 3000 divisions or dual range 3000+3000 divisions.

Easy to use and clean, multipurpose wall scales for weighing animal quarters and crates. These are completely in stainless steel, take up little space, and are suitable in areas which must meet strict hygiene requirements, like the meat industry.

Manufactured according to OIML R-76 / EN 45501 standards.  
Available also CE-M APPROVED.

### MAIN FEATURES

- 5-key functional waterproof keypad.
- 25mm LCD backlit display with 6 high contrast digits with icons indicating the active functions.
- Easy to clean ABS **waterproof IP65** enclosure built to withstand harsh treatment and corrosive environments
- Functions with 1 direct load IP66 aluminium cell with corrosion proof treatment and OIML certification.
- Bearing structure in AISI 304 stainless steel, predisposed for wall fastening and with level.
- Stainless steel satined folding top in AISI 304 fitted with quarter weighing hook.
- 3 m cable from platform to indicator.
- Digital calibration and set-up through keyboard or PC with DINITOOLS
- Built-in rechargeable battery (60- hour life with one 350-Ohm load cell) and 110-240 Vac internal power adapter

### SELECTABLE FUNCTIONS

- **High Resolution Weighing x 10**
- **Net/Gross or lb/kg conversion**
- **Accumulation**
- **Formula weighing**
- **+/- Checkweighing**
- **Percentage weighing**
- **Counting** (Max. resolution of 1.500.000 divisions)
- **In/Out Truck weighing**
- **Hold and Peak**
- **Peer-to-peer** (up to 4 remote connectable indicators)

### I/O SECTION

- RS232/C port for connection with printer/labeller, or for attached printer.
- RS232/C port configurable for PC, PLC, remote display, and radio modem
- Quick RJ RS232 plug connection
- IR input for remote control

### KEYBOARD FUNCTIONS

- Zeroing, Automatic tare, Presettable tare, printing and/or data transmission, selectable function command, on/off switching.

### Available versions

Code	Surface (LxP) mm	Max Capacity kg	Standard Division g	CE-M Division g (*)	CE-M2 Division g (*)
ECW15	490 x 500	150	50	50	20-50
ECW130	490 x 500	300	100	100	50-100

(\*) These divisions are obtainable only with the relative options

#### Options only available at time of order

Code	Description
ECEM1B	CE-M 3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
ECEM2B	CE-M 2x3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
OBTPRP	<b>Attached</b> thermal printer in ABS option box for ...XP indicators with 50mm/sec speed, 203 dpi resolution, 24/40 columns, 58 mm paper width; 50 mm Roll diameter.
OBMDP	<b>Attached</b> thermal printer and memory data printer (fitted with a memory card) in ABS option box for ...XP indicators
OBMMC	<b>Attached</b> Memory Data Printer option box with memory card for easy storage and transfer of the weighs to any Personal Computer (complete of memory card); mounted attached to the indicators with ABS case
OBCLTP	Three way control light option box in ABS with programmable acoustic signal, graph bar controller, attached to the indicator
OBRF	External radio interface, fitted in ABS case with IP65 protection and a 3-metre cable, for <b>weight indicator/repeater</b> . Max. functioning distance in adequate conditions: 70m indoors, 150m outdoors. Up to 50 configurable channels (OBRF must be combined with another radio modem).
OBRFUSB	868MHz radio frequency module for PC with USB input, selfpowered, connectable to USB ports. Fitted with USB connection cable. Max. functioning distance in appropriate conditions: 70m indoor, 150m outdoor. 50 available channels, easily programmable from the PC.
DFCLK	Real Time Clock (Time/date)
DFIO	Module of 2 optoisolated digital inputs + 2 Photomosfet outputs usable as programmable weight threshold setpoints (not combinable with alibi memory ALMEM)
ALMEM	Alibi memory (fiscal memory) with time/date; max. 120.000 weighs
DFTL	Remote control for use up to 8m, configurable as a single tare key or four keys
WIFIT	WI-FI interface for wireless connection (through access point) to the company computer system.
ETH	Ethernet bidirectional port, speed from 10 to 100 Mbps, TCP, UDP, IP, ARP, ICMP, Ethernet Mac protocols
ETHCBRJ	Ethernet cable, 1.5m long, for connection between indicator and PC network (necessary for ETH option)
USBMB	USB interface, as an alternative of the standard connector, for quick connection of the indicator to PC
USBCABMB	USB cable for connection between indicator and PC (to be used with USBMB)
DF485	RS485 bidirectional port
DAC16O	Analogue output with D/A 16 bit converter, configurable from 0 to 10Vdc or from 0 to 20mA; Maximum applicable resistance on the output in current is equal to 350 Ohm; minimum applicable resistance on the output in voltage equal to 10KOhm
RSCBRJ	RS232/C connection cable (1.5m long) to PC including female 9-pole connector and RJ connector

#### Accessories

Code	Description
STFI	<a href="#">Stainless steel bracket for fixing to wall.</a>