


## EL "BASIC" SERIES 4-CELL PLATFORMS

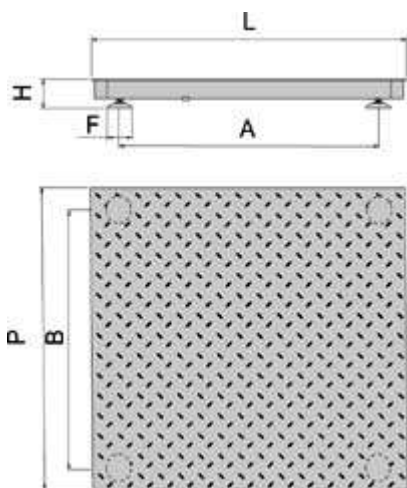

Mod./Dim.	L	P	H	A	B	F
ELC	800	800	90	650	650	75
ELA	1000	1000	90	850	850	75
ELB	1250	1250	90	1070	1070	75
ELD	1250	1500	110	1070	1320	75
ELE	1500	1500	110	1320	1320	75

dimensions in mm

Monobloc electronic platforms suitable for weighing in all types of industrial and commercial applications. Standard version is with approved load cell.

### MAIN FEATURES

- Fitted with 4 shear-beam approved load cells with input resistance of 350 Ohm and according to OIML R60 standards and IP67 protection from dust and water sprays.
- Monobloc steel tubular structure with fixed sheet-steel chequered loading surface.
- Junction box inspectionable through side drawer.
- Oven-fire painted RAL 5007 blue.
- Adjustable, stainless steel shock-proof jointed feet and level.
- Up to 15 Vdc power supply.
- Screened 5m long 6-pin cable with connectors for connection to the indicator.

### OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Connection to the indicator and calibration with CE-M 3000e single range or 3000e+3000e dual range approval (depending on indicators used)
- Stainless steel load cells.
- Models with special sizes and capacities (ask for estimate).

### ACCESSORIES

- Indicator support stand.
- Pit frame for flush floor installation.

### Available versions

Code	Dimensions (LxPxH)	Max Capacity kg	Standard Division g	CE-M Division g (*)	CE-M2 Division g (*)	HR Division g (*)
ELC3	800x800x90	300	50	100	--	20
ELC6	800x800x90	600	100	200	100-200	50
ELC15	800x800x90	1500	200	500	200-500	100
ELA3	1000x1000x90	300	50	100	--	20
ELA6	1000x1000x90	600	100	200	100-200	50
ELA15	1000x1000x90	1500	200	500	200-500	100
ELB3	1250x1250x90	300	50	100	--	20
ELB6	1250x1250x90	600	100	200	100-200	50
ELB15	1250x1250x90	1500	200	500	200-500	100
ELD6	1250x1500x110	600	100	200	100-200	50
ELD15	1250x1500x110	1500	200	500	200-500	100
ELD30	1250x1500x110	3000	500	1000	500-1000	200
ELE6	1500x1500x110	600	100	200	100-200	50
ELE15	1500x1500x110	1500	200	500	200-500	100
ELE30	1500x1500x110	3000	500	1000	500-1000	200

(\*) These divisions are obtainable only with the relative options

### Options only available at time of order

Code	Description
ECEM1B	CE-M 3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
ECEM2B	CE-M 2x3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
ECEM1C	CE-M 3000e initial stamping for class III or IIII scales with capacity from 1501 to 6000 kg
ECEM2C	CE-M 2x3000e initial stamping for class III or IIII scales with capacity from 1501 to 6000 kg
ETHR	High resolution (HR) model

### Accessories

Code	Description
CSP	<a href="#">Floor indicator support stand h=1080 mm</a>
ETATF	<a href="#">Frame for flush floor installation 1000x1000 mm</a>
ETMTF	<a href="#">Frame for flush floor installation 1000x1250 mm</a>
ETBTF	<a href="#">Frame for flush floor installation 1250x1250 mm</a>
ETDTF	<a href="#">Frame for flush floor installation 1250x1500 mm</a>
ETETF	<a href="#">Frame for flush floor installation 1500x1500 mm</a>
ETAR	Access ramp 1000x900 (lxp) for 1000x1000 and 1000x1250 mm platforms
ETBR	Access ramp 1250x900 (lxp) for 1250x1250 mm platform
ETDR	Access ramp 1250x1100 (lxp) for 1250x1500 mm platform
ETER	Access ramp 1500x1100 (lxp) for 1500x1500 mm platform
ETPFI	<a href="#">STAINLESS STEEL plates for installing platforms</a> (ELC, ETA, ELA, ETM, ETB, ELB, ETD, ELD, ETE, ELE, and ETF series) on the floor (set of 4)