


## "EPW" PALLET-WEIGHING FLOOR SCALES



EPW15 with CSP optional column

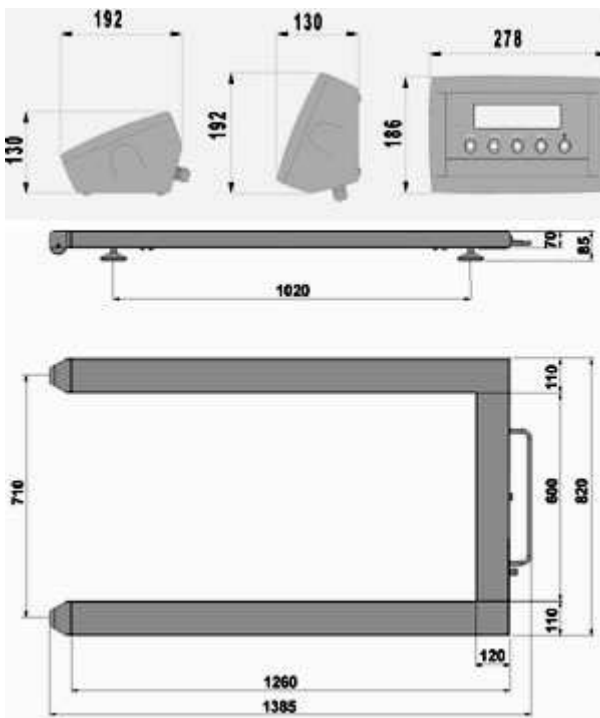

dimensions in mm

Multipurpose speedy and precise pallet-weighing movable scales, easy to use and move, and which quicken the weighing operations of any product on a europallet (800x1200 mm). It's equipped with wheels and handles, which allow to move and use the scale closer to the location in which one needs to weigh. CE-M approvable (OIML R-76 / EN 45501).

### MAIN FEATURES

- 5-key functional waterproof keypad.
- 25mm LCD backlit display with 6 high contrast digits with icons indicating the active functions.
- Easy to clean ABS **waterproof IP65** enclosure built to withstand harsh treatment and corrosive environments.
- Functions with Fitted with 4 shear-beam IP67 load cells (painted models) or with IP68 load cells (stainless steel models) able to handle double the nominal load.
- Carbon steel bearing structure, oven-fire painted, fitted with antishock and adjustable feet, level, and wheels and handles for moving it.
- Accuracy: +/- 0.05% of the capacity.
- Digital calibration and set-up through keyboard or PC with DINITOOLS.
- Fitted built-in rechargeable battery and internal 110-240 Vac power adapter.
- **The stainless steel model has structure and load surface in AISI304.**

### SELECTABLE FUNCTIONS

- **High Resolution Weighing x 10**
- **Net/Gross or lb/kg conversion**
- **Accumulation**
- **Formula weighing**
- **+/- Checkweighing**
- **Percentage weighing**
- **Counting** (Max. resolution of 1.500.000 divisions)
- **In/Out Truck weighing**
- **Hold and Peak**
- **Peer-to-peer** (up to 4 remote connectable indicators)
- **Set Point Control** (with optional interface)

### STANDARD I/O SECTION:




- RS232/C port configurable for connection with printer.
- RS232/C bi-directional port configurable for PC, PLC.

### KEYBOARD FUNCTIONS:

- Zeroing, Automatic tare; Presetable tare; Print and/or data transmission commands; selectable function command; on/off

### OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Attached stand or stainless steel bracket for fastening to wall.
- Thermal printer option box
- CE-M approved models for use with third parties: 3000e or dual range x3000e.

Available versions						
Code	Dimensions (LxPxH)	Max Capacity kg	Standard Division g	CE-M Division g (*)	CE-M2 Division g (*)	HR Division g (*)
EPW6	1260x800x85	600	100	200	100-200	50
EPW15	1260x800x85	1500	200	500	200-500	100
EPW30	1260x800x85	3000	500	1000	500-1000	---
EPWI6 	1260x800x85	600	100	200	100-200	50
EPWI15 	1260x800x85	1500	200	500	200-500	100
EPWI30 	1260x800x85	3000	500	1000	500-1000	---

(\*) These divisions are obtainable only with the relative options

Options only available at time of order	
Code	Description
ECEM1B	CE-M 3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
ECEM2B	CE-M 2x3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
ECEM1C	CE-M 3000e initial stamping for class III or IIII scales with capacity from 1501 to 6000 kg
ECEM2C	CE-M 2x3000e initial stamping for class III or IIII scales with capacity from 1501 to 6000 kg
EHR	High resolution model for internal factory use
OBTPRP	<b>Attached</b> thermal printer in ABS option box for ...XP indicators with 50mm/sec speed, 203 dpi resolution, 24/40 columns, 58 mm paper width; 50 mm Roll diameter.
OBMDP	<b>Attached</b> thermal printer and memory data printer (fitted with a memory card) in ABS option box for ...XP indicators
OBMMC	<b>Attached</b> Memory Data Printer option box with memory card for easy storage and transfer of the weighs to any Personal Computer (complete of memory card); mounted attached to the indicators with ABS case
OBMMCI	Memory Data Printer option box in <b>Stainless Steel</b> with memory card for easy storage and transfer of the weighs to any Personal Computer (complete of memory card)
OBCLTI	Three way control light STAINLESS STEEL option box with programmable acoustic signal, graph bar controller, attached to the indicator
OBCLTP	Three way control light option box in ABS with programmable acoustic signal, graph bar controller, attached to the indicator
OBRF	External radio interface, fitted in ABS case with IP65 protection and a 3-metre cable, for <b>weight indicator/repeater</b> . Max. functioning distance in adequate conditions: 70m indoors, 150m outdoors. Up to 50 configurable channels (OBRF must be combined with another radio modem).
OBRFUSB	868MHz radio frequency module for PC with USB input, selfpowered, connectable to USB ports. Fitted with USB connection cable. Max. functioning distance in appropriate conditions: 70m indoor, 150m outdoor. 50 available channels, easily programmable from the PC.
DFCLK	Real Time Clock (Time/date)
DFIO	Module of 2 optoisolated digital inputs + 2 Photomosfet outputs usable as programmable weight threshold setpoints (not combinable with alibi memory ALMEM)
ALMEM	Alibi memory (fiscal memory) with time/date; max. 120.000 weighs
DFTL	Remote control for use up to 8m, configurable as a single tare key or four keys
WIFIT	WI-FI interface for wireless connection (through access point) to the company computer system.
ETH	Ethernet bidirectional port, speed from 10 to 100 Mbps, TCP, UDP, IP, ARP, ICMP, Ethernet Mac protocols
ETHCBRJ	Ethernet cable, 1.5m long, for connection between indicator and PC network (necessary for ETH option)
USBMB	USB interface, as an alternative of the standard connector, for quick connection of the indicator to PC
USBCABMB	USB cable for connection between indicator and PC (to be used with USBMB)
DF485	RS485 bidirectional port
DAC160	Analogue output with D/A 16 bit converter, configurable from 0 to 10Vdc or from 0 to 20mA; Maximum applicable resistance on the output in current is equal to 350 Ohm; minimum applicable resistance on the output in voltage equal to 10KOhm
RSCBRJ	RS232/C connection cable (1.5m long) to PC including female 9-pole connector and RJ connector

Accessories	
Code	Description
CSP42I	STAINLESS steel support column for the DFW, 3590, TRS series' indicators. Easy to install and to clean. Adjustable feet, guaranteeing the maximum stability.
STFI	<a href="#">Stainless steel bracket for fixing to wall.</a>



EPWI- closed structure and pointed end for eased entry and hypersanitizable stainless steel foot