


FL SERIES "FLOOR" PLATFORM



IP67

CE M 3000e

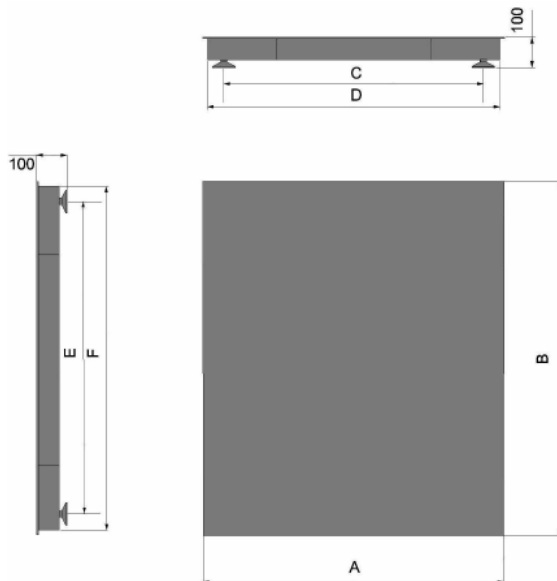

Monobloc electronic platforms suitable for weighing above ground in all types of industrial and commercial applications. Connectable to any weight indicator for load cells.

TECHNICAL FEATURES

- Functioning with 4 shear-beam 350Ohm nickel-plated steel load cells, approved according to OIML R60 C3 standards (3000 divisions), IP67 protection degree.
- Monobloc structure with oven-fire painted steel tubular, adjustable resting feet, and level.
- Fixed sheet steel chequered load surface.
- Up to 15 Vdc power supply.
- Screened 3m connection cable for connection to the indicator.
- Upon request:
 - 3000e CE-M approval;
 - support column for indicator.

Modell	Méretek [mm]					
	A	B	C	D	E	F
FLA	1000	1000	860	970	860	970
FLM	1000	1250	860	970	1110	1220
FLB	1250	1250	1110	1220	1110	1220
FLD	1250	1500	1110	1220	1360	1470
FLE	1500	1500	1360	1470	1360	1470

Available versions

Code	Dimensions (LxPxH)	Max Capacity kg	Division g	CE-M Division g
FLA600	1000x1000x100	600	200	200
FLA1500	1000x1000x100	1500	500	500
FLM600	1000x1250x100	600	200	200
FLM1500	1000x1250x100	1500	500	500
FLB600	1250x1250x100	600	200	200
FLB1500	1250x1250x100	1500	500	500
FLD1500	1250x1500x100	1500	500	500
FLD3000	1250x1500x100	3000	1000	1000
FLE1500	1500x1500x100	1500	500	500
FLE3000	1500x1500x100	3000	1000	1000

Weight Indicators and Accessories

Code	Description
DFWL	Multifunction weight indicator, in IP54 case, with 5-key easy to use keypad.
DFWLI	Multifunction weight indicator, in IP68 stainless steel, with 5-key easy to use keypad.
DFWLKI	Multifunction weight indicator, in IP68 stainless steel, with 17-key easy to use keypad.
AFW	Multifunction weight indicator in ABS, with LCD display having 6 high contrast 24mm digits, power supply through built-in rechargeable battery
ILW	Multifunction weight indicator in ABS, with LCD display having 6 high contrast 52mm digits, power supply through built-in rechargeable battery
ECM1B	CE-M 3000e approval for class III or IIII scales, with capacity from 31 to 1500 kg
CSP38I	STAINLESS steel support column, for the AFW and ILW series' indicators. Easy to install and clean. Adjustable feet, for guaranteeing the maximum stability. Dimensions 520 x 527 x 1026 mm.
CSP38D	STAINLESS steel support column, for the indicators. Easy to install and clean. Column height 750 mm.

Configuration Example

FLA platform, connected to the DFWL indicator installed on the CSP42I column and the DFTL control, for use the scale at distance.

