


"IFKPB" PROFIBUS INTERFACE FOR DINI ARGEO INDICATORS

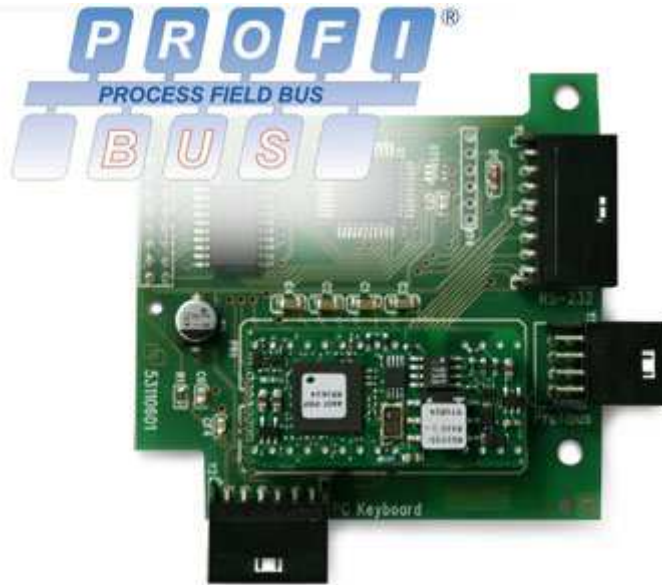

Interface which allows to connect the Dini Argeo weight indicators to Profibus networks. Wide range of available data.

TECHNICAL FEATURES:

- Complete functionality from the Profibus-DP Slave, secondo IEC 61158.
- 16 input bytes / 16 bytes output on SSC interface.
- Automatic baud rate selection: from 9600 bit/s to 12Mbit/s.
- Board optoisolation against electric or electrostatic discharges.
- Wide range of available data depending on the weight indicator to which it is applied.
- Available for these indicators: CPW03BELT, CPW03LW, CPW03CHECK.
- NOTE: this board is an option available only when ordering the weight indicator.

Available versions:

Code	Description
------	-------------

IFKPB	PROFIBUS serial interface (with cable having a 9-pin connector for connection to Profibus external device)
-------	--